


DESIGN FEATURES:

- Steam rating: 150 psi WSP
- ISO 5211 Actuator Mounting Pad
- Blow-out-proof stem design
- Anti-Static Device
- Adjustable Stem Packing
- Locking Device
- Body: ASTM A351 Gr. CF8M
 ASTM A216 Gr. WCB
- ME-PTFE SEAL KITS: REPLACES PTFE, RPTFE AND FPA
 LOW DEFORMATION UNDER LOAD
 LOW PERMEATION
- Temperature Rating: -45.5°C (-50°F) to 246°C (475°F)
- Long Cycle Life
- ANSI B16.5 B16.10 and B16.34 Full Compliance
- API 607 4th Edition FIRE SAFE APPROVAL
- TEST STANDARD: API 598
- Vacuum Service to 29" Hg



SERIES 410 2-PIECE FULL PORT BALL VALVE (FLANGED 150#)



MATERIALS LIST

NO.	PART NAME	MATERIAL		QTY
		STAINLESS STEEL	CARBON STEEL	
1	BODY	ASTM A351 Gr.CF8M	ASTM A216 WCB	1
2	CAP	ASTM A351 Gr.CF8M	ASTM A216 WCB	1
3	BALL	ASTM A351 Gr.CF8M	ASTM A351 Gr.CF8M	1
4	STEM	ASTM A276 Gr.316	ASTM A276 Gr.316	1
5	SEAT	*ME-PTFE	*ME-PTFE	2
6	GASKET	GRAFOIL	GRAFOIL	1
7	THRUST WASHER	*ME-PTFE	*ME-PTFE	1
8	PACKING	GRAFOIL	GRAFOIL	1
9	GLAND	ASTM A351 Gr.CF8	ASTM A351 Gr.CF8	1
10	STOPPER	SS304	SS304	1
11	HANDLE NUT	SS304	SS304	2
12	GLAND BOLT	ASTM A193 Gr.B8	ASTM A193 Gr.B8	2
13	STUD BOLT	ASTM A193 Gr.B8	ASTM A193 Gr.B7M	4-10
14	SET NUT	ASTM A194 Gr.8	ASTM A194 Gr.2HM	4-10
15	HANDLE	SS304	SS304	1
16	LOCKING PLATE	SS304	SS304	1

* ME-PTFE IS Molecularly Enhanced PTFE PRESSURE TEMPERATURE RATINGS

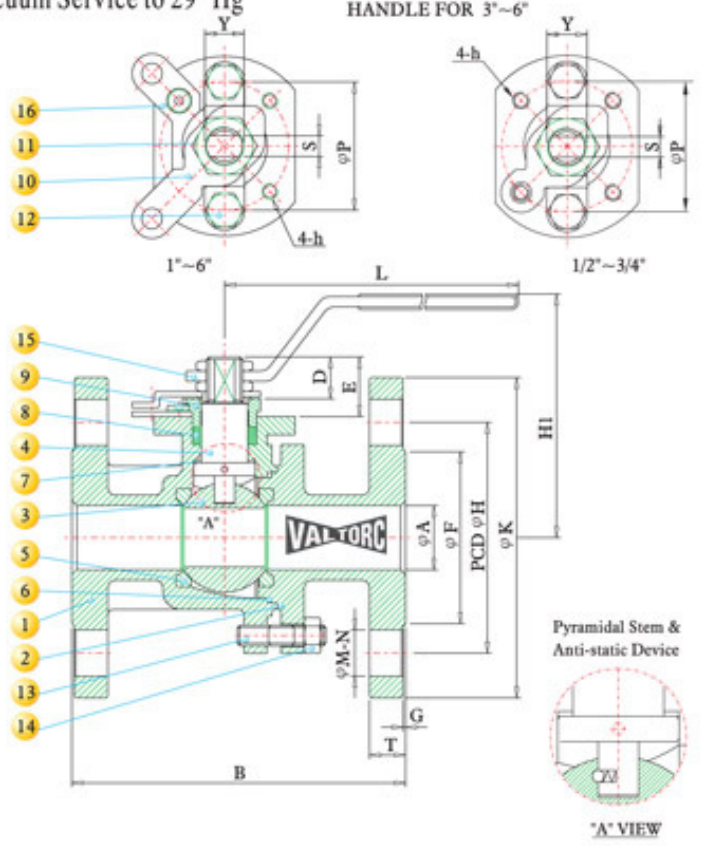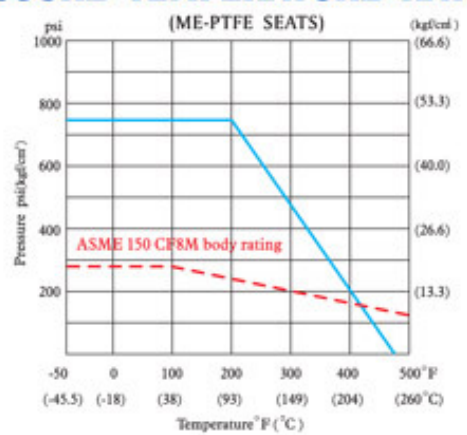

DIMENSIONS

SIZE	A		B		D		E		F		G		H		K		T		M		N	P		S		L		H1		h	Y	Cv	Weight		
	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm		inch	mm	inch	mm	inch	mm	inch	mm				Factor	Kg	Lb
1/2"	15	0.59	15.0	4.25	107.9	0.56	14.1	0.98	25.0	1.38	35.0	0.06	1.6	2.38	60.4	3.50	88.9	0.44	11.1	0.62	15.7	4	1.65	42	0.32	8	5.18	131.5	2.91	73.8	M5*P0.8	M14*P2.0	26	1.81	3.99
3/4"	20	0.79	20.0	4.62	117.3	0.59	15.1	0.98	25.0	1.69	42.9	0.06	1.6	2.75	69.8	3.88	98.5	0.44	11.1	0.62	15.7	4	1.65	42	0.32	8	5.18	131.5	2.94	74.8	M5*P0.8	M14*P2.0	55	2.10	4.63
1"	25	0.98	25.0	5.00	127.0	0.62	15.8	1.24	31.5	2.00	50.8	0.06	1.6	3.12	79.2	4.25	107.9	0.44	11.1	0.62	15.7	4	1.97	50	0.39	10	6.42	163.0	3.44	87.4	M6*P1.0	M16*P2.0	110	3.00	6.61
1 1/4"	32	1.26	32.0	5.50	139.7	0.62	15.8	1.24	31.5	2.50	63.5	0.06	1.6	3.50	88.9	4.62	117.3	0.50	12.7	0.62	15.7	4	1.97	50	0.39	10	6.42	163.0	3.63	92.2	M6*P1.0	M16*P2.0	180	4.50	9.91
1 1/2"	40	1.50	38.0	6.50	165.1	0.86	21.8	1.67	42.3	2.88	73.1	0.06	1.6	3.88	98.5	5.00	127.0	0.56	14.2	0.62	15.7	4	2.76	70	0.39	10	9.13	232.0	4.76	121.0	M8*P1.25	M16*P2.0	270	6.20	13.66
2"	50	1.97	50.0	7.00	177.8	0.86	21.8	1.67	42.3	3.62	91.9	0.06	1.6	4.75	120.6	6.00	152.4	0.62	15.7	0.75	19.0	4	2.76	70	0.39	10	9.13	232.0	5.08	129.0	M8*P1.25	M16*P2.0	500	9.00	19.82
2 1/2"	65	2.56	65.0	7.50	190.5	0.86	21.8	1.67	42.3	4.12	104.6	0.06	1.6	5.50	139.7	7.00	177.8	0.69	17.5	0.75	19.0	4	2.76	70	0.55	14	9.13	232.0	5.55	141.0	M8*P1.25	M22*P2.5	800	13.00	28.63
3"	80	3.15	80.0	8.00	203.2	1.10	28.0	2.21	56.3	5.00	127.0	0.06	1.6	21.49	546.0	7.50	190.5	0.75	19.0	0.75	19.0	4	4.02	102	0.55	14	12.87	327.0	6.52	165.7	M10*P1.5	M22*P2.5	1150	21.00	46.26
4"	100	3.94	100.0	9.00	228.6	1.10	28.0	2.21	56.3	6.19	157.2	0.06	1.6	21.49	546.0	9.00	228.6	0.94	23.8	0.75	19.0	8	4.02	102	0.55	14	12.87	327.0	7.11	180.7	M10*P1.5	M22*P2.5	2120	32.00	70.48
6"	150	5.91	150.0	15.50	393.7	1.48	37.7	2.65	67.3	8.50	215.9	0.06	1.6	40.62	1032.0	11.00	279.4	1.00	25.4	0.88	22.3	8	4.92	125	0.79	20	42.20	1072.0	9.95	252.8	M12*P1.75	M30*P3.5	5100	75.00	165.20